

# NTF12-75

## Characteristics

Nominal Voltage		12V
Nominal Capacity (10 hour rate)		75Ah
Capacity 25°C(77°F)	10 hour rate (7.5A)	75Ah
	3 hour rate (19.9A)	59.7Ah
	1 hour rate (48.7A)	48.7Ah
Internal Resistance	Full Charged Battery 25°C(77°F)	≤12m Ω
Cyclic Life	50%(C <sub>10</sub> ) Depth of discharge	600Times
Float Life	25°C(77°F) Float charge at 13.8V	About 5 Years
Capacity affected by Temperature (10 hour )	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C(77°F)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
	Capacity after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Cycle	Initial Charging Current Less than 22.5A Voltage 14.6-15.0V
	Float	Voltage 13.5-13.8V


## Product Image




## Parking

Battery (L×W×H)	mm ± 1	562×114×188
	inch	22.1×4.49×7.40
Box (L×W×H)	mm ± 2	
	inch	
Quantity Per Box		1 PCS
Net weight Per Cell		24Kg ± 150g
Net weight Per Box		24 Kg
Gross Weight		24.5 Kg

## Discharge Curve

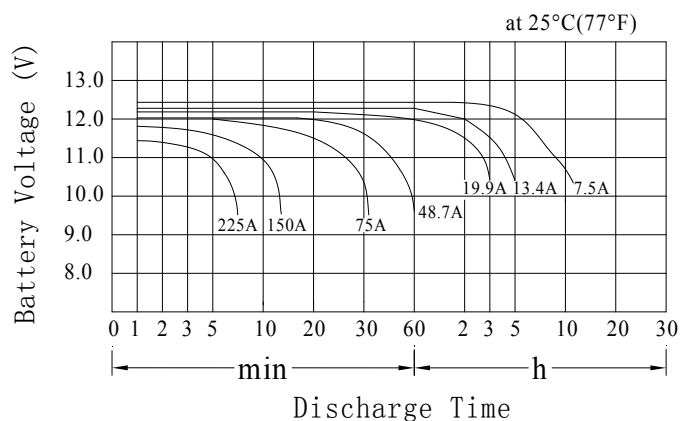

## Product Dimensions



## Battery Construction

Component	Positive plate	Negative plate	Container	Safety valve	Terminal	Separator	Electrolyte
Raw Material	Lead dioxide	Lead	ABS	Rubber	Pb	Fiberglass	Sulfuric acid

## Discharge Characteristics

Voltage	Run Time (Constant Current and Power 25°C 77° F)										
	3 min	5 min	15 min	30 min	45 min	1h	2h	3h	5h	8h	10h
9.6 V	3278	2850	1613	1035	773	559	315	237	158	105	93
10.2V	3150	2438	1448	923	743	552	304	233	156	104	92
10.5V	2888	2310	1365	840	728	543	293	229	154	102	91
10.8V	2640	2198	1185	750	705	533	285	218	147	101	90